



SPITA Twist-to-Clip[®] tie wrap

*Quick and easy to install,
no tools required*

Simply remove the end by twisting it clockwise or counter clockwise. The end breaks immediately and leaves no sharp edges which can damage your hands or cables.




SPECIFICATIONS			
Material	polyamide 6.6 (nylon)		
Thickness	1,4 mm		
Width	2,8 mm	4,6 mm	8 mm
Tensile strength	8 kg	22 kg	54 kg
Length in mm	102 / 150	200 / 300	360 / 504
Available colours	black, clear, green		



NOTE:

*Once the tail end of the **SPITA Twist-to-Clip[®]** has been inserted through the slot on the other side and has passed the first ridge, it cannot be removed or re-opened.*

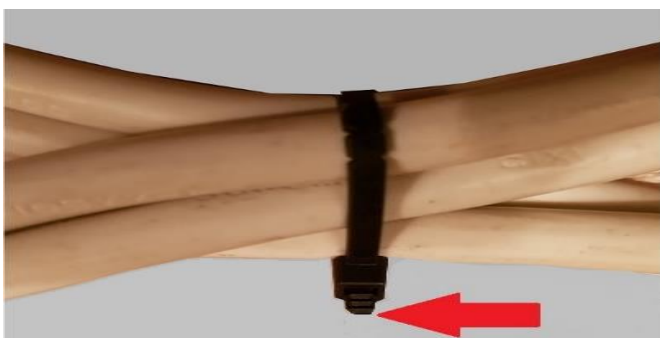

No sharp edge after tail is removed

FEATURES

- General purpose applications, indoor / outdoor
- Flammability rating UL 94 V-2
- Halogen free and silicone free
- UV-resistant (only black & green)
- Heat resistant up to +85° Celsius
- Remains flexible till -40° Celsius
- Resists acids, salt, oil and grease



SPITA Smart Products B.V.
Industrieweg 18-9
3846 BD HARDERWIJK (NL)
Tel.: +31 341 414 993
e-mail: sales@spita.eu
www.spita.eu